

Black NXL line w/compression fitting supplemental instructions



Figure A

Lay components out in this exact order.

(Figure A) Components include:

1. Black Hose
 2. Male end of compression fitting.
 3. Compression Farrel
 4. Female end of compression fitting.
 5. B-nut
 6. Insert
- Existing D-3 Fitting

Install them on the line one by one. Place the insert into the B-nut and thread a D-3 fitting onto the B-nut to hold the fitting in place. (Figure B). Before pressing the insert into the hose, be sure the hose end is inserted all the way into the female end of the compression fitting as shown in Figure C. (If not assembled properly hose malfunction may occur. Nitrous Express Inc. is not liable when hose is poorly assembled.)




Figure B

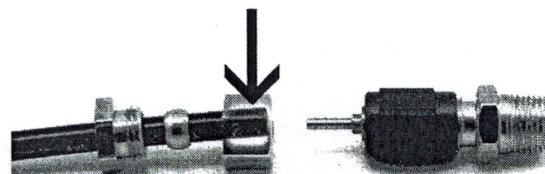


Figure C

Figure D shows the completed hose. Note the male and female ends of the compression fitting have a small gap in between them. It should not be necessary to make these surfaces touch.



Figure D